

I Application

The NHS agitators are vertical agitators with worm gearmotor. They can be used in mixing, dissolution and maintenance processes where a mild to medium mixing is required. This agitator is designed for the food-processing, cosmetic and pharmaceutical industries and it is provided with the most suitable finish for each industry.

The NHS agitator can be used in tanks of up to 10.000 L with products of medium to high viscosity.

I Operating principle

The agitators are installed inside the tank either centrally with current deflectors or offset so that the position itself prevents the rotation of the mixed product. The rotation of the propeller makes the product flow to the bottom and then up to the surface along the walls of the tank. The effect is enhanced if the bottom of the tank is curved.

I Design and features

Vertical agitator.

Sealing: splash ring and lip seal.


Propeller fixed to the shaft by Allen cap screws.

Worm gear motor with smooth surfaces and food-grade oil:

IEC, IP55, F-class insulation.

Propeller with 4 inclined blades (T11).

Options

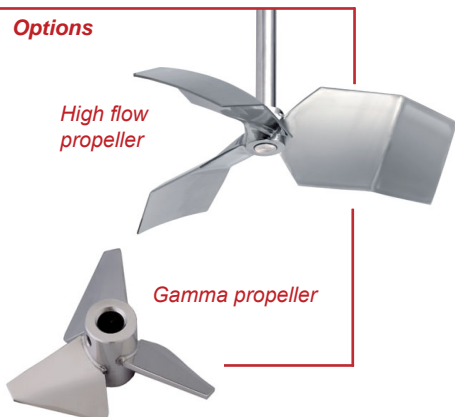

I Materials

Parts in contact with the product	AISI 316
Lip seal	NBR
Gear housing	Aluminium
Surface finish	$Ra \leq 0,8 \mu m$

I Options

FPM lip seal (FDA).

Shaft and propeller lined with plastic material for use with corrosive products.

Welded propeller with $Ra \leq 0,5 \mu m$ surface finish.

Propeller with 2 inclined blades (T6).

Gamma propeller (T16).


High flow propeller (T19).

Geared motor shroud.

Other motor protections available on request.



I Technical specifications and dimensions

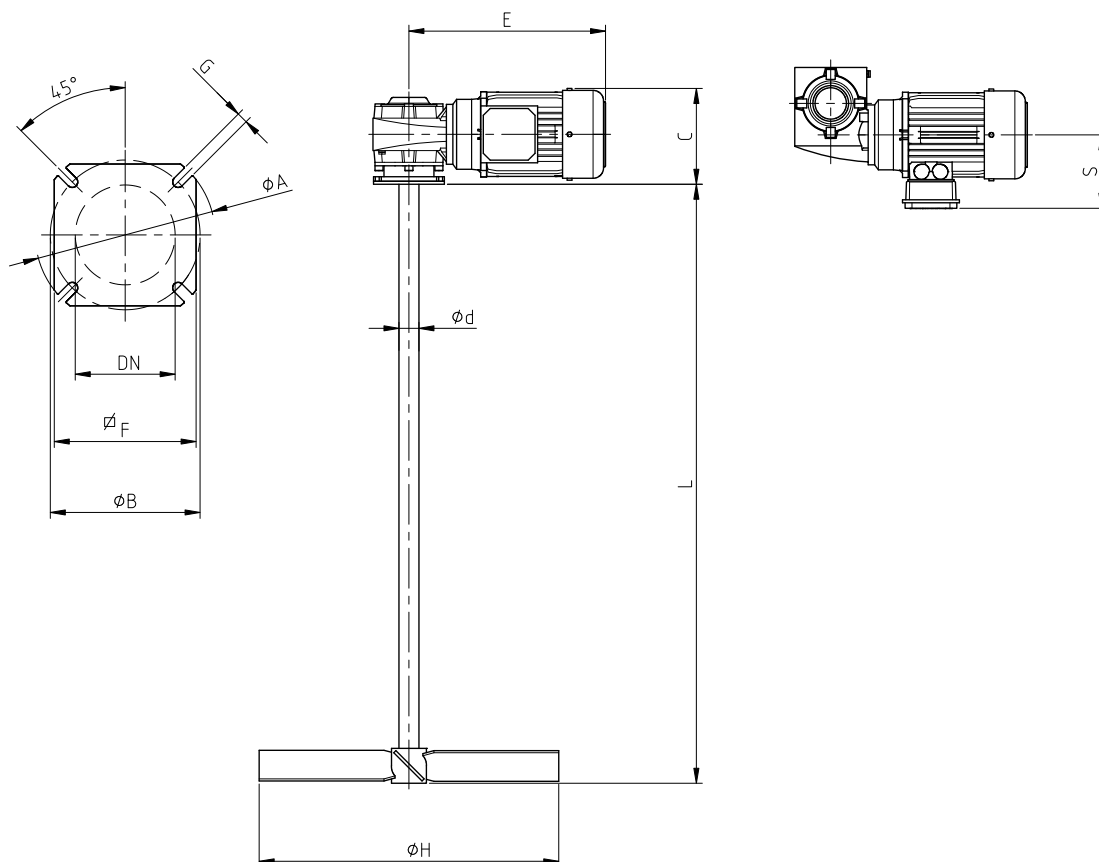

Agitator	Motor power	Speed	Dimensions								Agitator shaft	Type 11	Inclined blades
			C	E	S	Flange					Ø d	Lmax	Ø H
	[kW]	[r/min]				Ø A	Ø B	Ø DN	F	Ø G			
NHS 1.11-06905-300	0,55	69	174	340	142	125	85	50	110	11	35	1500	300
NHS 1.11-18305-300	0,55	183	174	340	142	125	85	50	110	11	35	1500	300
NHS 1.11-13805-400	0,55	138	174	340	142	125	85	50	110	11	35	1500	400
NHS 1.11-11005-500	0,55	110	174	340	142	125	85	50	110	11	35	1500	500
NHS 1.11-11411-600	1,1	114	192	395	147	180	150	100	142	11	40	2000	600
NHS 1.11-09822-800	2,2	98	211	455	169	200	165	125	170	14	45	2000	800

*Dimensions with the standard INOXPA motor. Dimensions may vary depending on the motor.

