



## Alfa Laval SMP-BCA

### Double seal valves

#### Introduction

The Alfa Laval SMP-BCA Mixproof Valve with PTFE Diaphragm is an aseptic double-seal valve designed for use under aseptic conditions and sterilization involving high temperatures. Based on the Alfa Laval SMP-BC, the SMP-BCA features a straightforward design that keeps liquids separated using two seals on the same plug with a leakage chamber in between. With its PTFE face and reinforced EPDM rubber backing, the diaphragm follows the plug movement of the upper valve body and ensures no increase in the concentration of microorganisms in the product during processing.

#### Application

This aseptic double-seal mixproof valve is designed for extended shelf-life and aseptic applications in the dairy, food, beverage, biotech, pharmaceutical and many other industries.

#### Benefits

- Aseptic double-seal mixproof valve
- Versatile, modular design meets most aseptic application requirements
- Cost effective
- Easy to maintain

#### Working principle

The Alfa Laval SMP-BCA Mixproof Valve is operated by means of compressed air from a remote location. This aseptic valve is a normally closed (NC) valve. A specially designed diaphragm unit with a PTFE face and reinforced EPDM rubber backing ensures sterile steam sealing prevents intrusion from the atmosphere and does not allow product residues to build up on the product contact surface. The product lines are separated by two seals and a sterile barrier chamber to prevent mixing the products and to ensure immediate indication in the event of leakage from one of the seals. Two small pneumatic normally open (NO) valves control flow to and from the sterile barrier chamber. The barrier chamber must be clean and sterile when the main valve is closed.



#### Standard design

The Alfa Laval SMP-BCA Mixproof Valve consists of valve bodies, bonnet, stem with diaphragm unit, PTFE EPDM or FPM plug seals and an actuator. The valve is assembled by means of clamp rings and a stem clip system for easy maintenance. It is also available as a shut-off valve. The valve can also be fitted with the Alfa Laval ThinkTop V50 and V70 for sensing and control of the valve.



## TECHNICAL DATA

| Temperature                                         |                           |
|-----------------------------------------------------|---------------------------|
| Temperature range:                                  | -10°C to 140°C (EPDM)     |
| Max. sterilization temperature (steam - short time) | 150°C - 380 kPa (3.8 bar) |


| Pressure                    |                          |
|-----------------------------|--------------------------|
| Pressure range:             | 0-800 kPa (0-8 bar)      |
| Optimum process conditions: | >50 kPa (0.5 bar), >20°C |
| Air pressure:               | 500-800 kPa (5-8 bar)    |

**Note!** Vacuum is not recommended in aseptic applications.

## PHYSICAL DATA

| Material                    |                                       |
|-----------------------------|---------------------------------------|
| Product wetted steel parts: | 1.4404 (316L)                         |
| External surface finish     | Semi-bright (blasted)                 |
| Internal surface finish     | $Ra \leq 1.6 \mu m$                   |
| Optional:                   | Bright (polished) $Ra \leq 0.8 \mu m$ |
| Other steel parts:          | 1.4301 (304)                          |
| Product wetted seals:       | EPDM and PTFE                         |
| Optional:                   | NBR and PTFE, FPM and PTFE            |
| Other seals                 | NBR, EPDM                             |

### Valve body combination

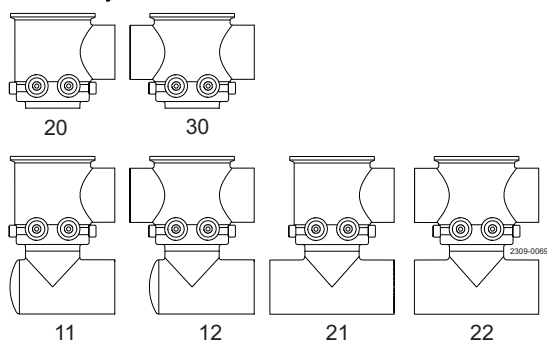

Type 20 and 30 body versions are on request available in following configurations:

- Tee welded on lower port in 0 or 90 deg. version. Type: 21 and 22
- Bend welded on lower port in 0, 90, 180 or 270 deg. version. Type: 11 and 12

### Options

- A. Male parts or clamp ends in accordance with required standard.
- B. Control and Indication: ThinkTop V50 and V70, IndiTop.
- C. Larger actuator for valve sizes 38-51 mm/DN 40-50.
- D. CIP installation kits.
- E. Other valve body combinations.
- F. Service tool for actuator.
- G. Tool for plug seals (Necessary for changing the seals).

### Note!

For further details, see also ESE01563 and instruction manual ESE02251.

### Air consumption (litres free air)

| Size                    | 38 mm, 51 mm/DN40,50<br>Actuator ø89 | 63.5, 76.1, 101.6 mm/DN 65, 80, 100<br>Actuator ø133 |
|-------------------------|--------------------------------------|------------------------------------------------------|
| Stop valve/Divert valve | 0.2 x Air pressure (bar)             | 0.7 x Air pressure (bar)                             |

Expected lifetime of diaphragm unit under normal conditions:




(no pressure shocks or cavitation).

| Size/Type     | Stop valve<br>activations | Divert valve<br>activations |
|---------------|---------------------------|-----------------------------|
| 38mm/DN40     | 12.000                    | 10.000                      |
| 51mm/DN50     | 12.000                    | 10.000                      |
| 63.5mm/DN65   | 12.000                    | 5.000                       |
| 76.1mm/DN80   | 5.000                     | 5.000                       |
| 101.6mm/DN100 | 5.000                     | 5.000                       |


**Note!** Activating the valve without internal product pressure reduces lifetime of diaphragm unit.

## Pressure drop/capacity diagrams





### Stop valve:

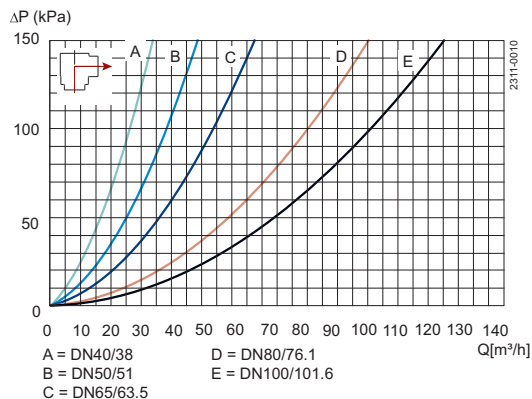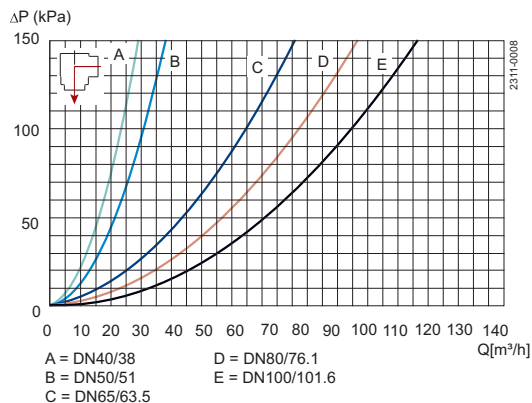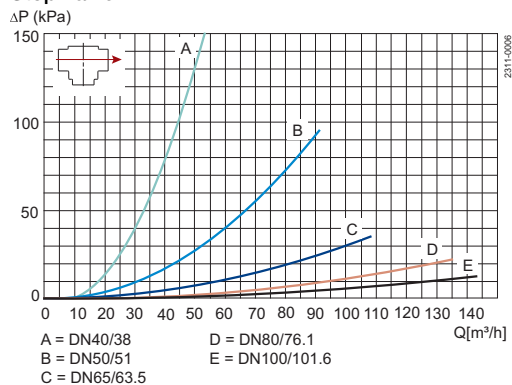

### CIP chamber:

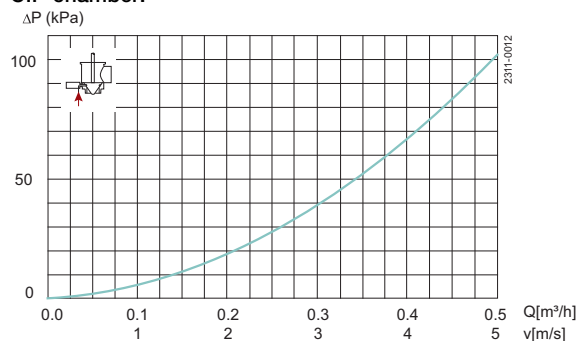

### Divert valve (obsolete product):

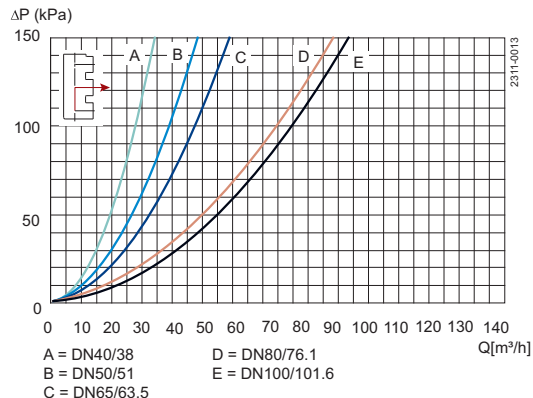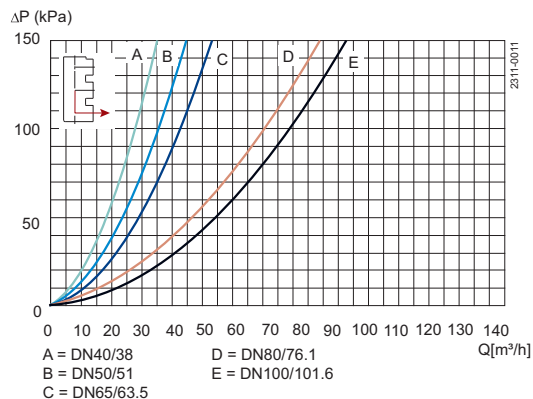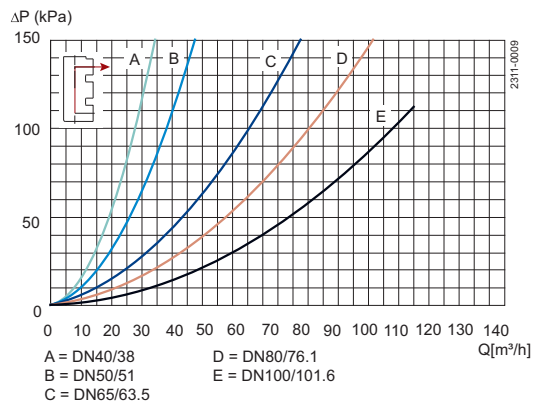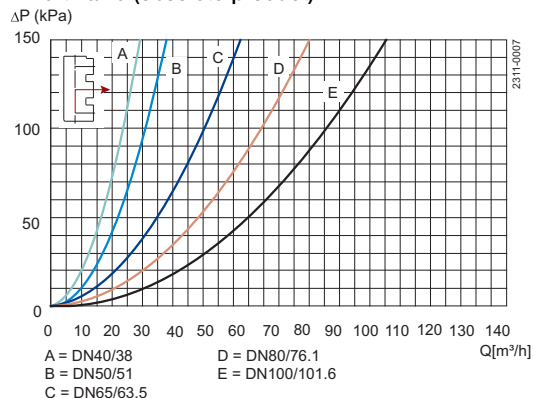



NOTE! For the diagrams the following applies:

Medium: Water (20°C).

Measurement: In accordance with VDI 2173.


## Pressure data for SMP-BCA

1. Upper plug. Max. product pressure  $P_1$  without leakage due to pressure shocks, as a function of support air pressure.


| Direction of pressure                                                             | Valve size | Actuator size | Spring type | Support air pressure (bar) |      |
|-----------------------------------------------------------------------------------|------------|---------------|-------------|----------------------------|------|
|                                                                                   |            |               |             | 0                          | 3    |
|  | 38mm/      | ø89           | Normal      | 6.0                        | 16.0 |
|                                                                                   | DN40       | ø89           | Strong      | 9.6                        | 19.5 |
|                                                                                   |            | ø133          | Normal      | 16.0                       | 30.0 |
|                                                                                   |            | ø133          | Strong      | 22.0                       | 30.0 |
|  | 51mm/      | ø89           | Normal      | 6.0                        | 16.0 |
|                                                                                   | DN50       | ø89           | Strong      | 9.6                        | 19.5 |
|                                                                                   |            | ø133          | Normal      | 16.0                       | 30.0 |
|                                                                                   |            | ø133          | Strong      | 22.0                       | 30.0 |
|                                                                                   | 63.5mm/    | ø133          | Normal      | 9.6                        | 25.5 |
|                                                                                   | DN65       | ø133          | Strong      | 16.0                       | 30.0 |
|                                                                                   | 76.1mm/    | ø133          | Normal      | 6.5                        | 14.5 |
|                                                                                   | DN80       | ø133          | Strong      | 9.2                        | 17.5 |
|                                                                                   | 101.6mm/   | ø133          | Normal      | 4.0                        | 11.0 |
|                                                                                   | DN100      | ø133          | Strong      | 6.5                        | 14.4 |

F1 = Spring + support Air

2. Upper plug. Max. product pressure  $P_2$  against which the valve can open, as a function of air pressure.

| Direction of pressure                                                               | Valve size | Actuator size | Spring type | Support air pressure (bar) |     |
|-------------------------------------------------------------------------------------|------------|---------------|-------------|----------------------------|-----|
|                                                                                     |            |               |             | 3                          | 4   |
|  | 38mm/      | ø89           | Normal      | 8.0                        | 8.0 |
|                                                                                     | DN40       | ø89           | Strong      | -                          | 8.0 |
|                                                                                     |            | ø133          | Normal      | 8.0                        | 8.0 |
|                                                                                     |            | ø133          | Strong      | -                          | 8.0 |
|                                                                                     | 51mm/      | ø89           | Normal      | 8.0                        | 8.0 |
|                                                                                     | DN50       | ø89           | Strong      | -                          | 8.0 |
|                                                                                     |            | ø133          | Normal      | 8.0                        | 8.0 |
|                                                                                     |            | ø133          | Strong      | -                          | 8.0 |
|                                                                                     | 63.5mm/    | ø133          | Normal      | 4.0                        | 8.0 |
|                                                                                     | DN65       | ø133          | Strong      | -                          | 1.4 |
|                                                                                     | 76.1mm/    | ø133          | Normal      | 2.8                        | 7.0 |
|                                                                                     | DN80       | ø133          | Strong      | -                          | 2.0 |
|                                                                                     | 101.6mm/   | ø133          | Normal      | 2.2                        | 4.6 |
|                                                                                     | DN100      | ø133          | Strong      | -                          | 1.6 |

3. Upper valve. Max. product pressure  $P_3$  in upper valve body at which the valve can close.

| Direction of pressure                                                               | Valve size    | Actuator size, spring type |             |              |              |
|-------------------------------------------------------------------------------------|---------------|----------------------------|-------------|--------------|--------------|
|                                                                                     |               | ø89, Normal                | ø89, Strong | ø133, Normal | ø133, Strong |
|  | 38mm/DN40     | 2.7                        | 4.5         | 8.0          | 8.0          |
|                                                                                     | 51mm/DN50     | 2.4                        | 4.0         | 6.0          | 8.0          |
|                                                                                     | 63.5mm/DN65   | -                          | -           | 7.0          | 8.0          |
|                                                                                     | 76.1mm/DN80   | -                          | -           | 7.0          | 8.0          |
|                                                                                     | 101.6mm/DN100 | -                          | -           | 5.0          | 8.0          |
|                                                                                     |               |                            |             |              |              |

F2 = Air - spring


F3 = Spring

Note! If actuator is supported by air on spring side; max allowable pressure is 300 kPa (3 bar)

Air reduction valve: Alfa Laval item no. 9611995903 ensuring max 3 bar support air.


# Pressure data for SMP-BCA

4. Lower valve, change-over. Max. product pressure  $P_4$  without leakage, as a function of air pressure.

| Direction of pressure                                                             | Valve size        | Actuator size | Spring size | Air pressure (bar) |
|-----------------------------------------------------------------------------------|-------------------|---------------|-------------|--------------------|
|                                                                                   |                   |               |             | 3                  |
|  | 38mm/<br>DN40     | ø89           | Normal      | *                  |
|                                                                                   |                   | ø89           | Strong      | *                  |
|                                                                                   |                   | ø133          | Normal      | 8.6                |
|                                                                                   |                   | ø133          | Strong      | *                  |
|                                                                                   | 51mm/<br>DN50     | ø89           | Normal      | *                  |
|                                                                                   |                   | ø89           | Strong      | *                  |
|                                                                                   |                   | ø133          | Normal      | 8.6                |
|                                                                                   |                   | ø133          | Strong      | *                  |
|                                                                                   | 63.5mm/<br>DN65   | ø133          | Normal      | 3.4                |
|                                                                                   |                   | ø133          | Strong      | *                  |
|                                                                                   | 76.1mm/<br>DN80   | ø133          | Normal      | *                  |
|                                                                                   |                   | ø133          | Strong      | *                  |
|                                                                                   | 101.6mm/<br>DN100 | ø133          | Normal      | *                  |
|                                                                                   |                   | ø133          | Strong      | *                  |

\* = Valve cannot close

5. Upper valve. Max. CIP pressure  $P_{CIP}$  without leakage to product area as a function of product pressure below plug.

| Direction of pressure                                                               | Valve size        | Actuator size | Spring size | Product pressure $P_5$ below plug (bar) |      |      |
|-------------------------------------------------------------------------------------|-------------------|---------------|-------------|-----------------------------------------|------|------|
|                                                                                     |                   |               |             | 0                                       | 2    | 4    |
|  | 38mm/<br>DN40     | ø89           | Normal      | 9.0                                     | 6.3  | 3.5  |
|                                                                                     |                   | ø89           | Strong      | 10.0                                    | 9.9  | 7.2  |
|                                                                                     |                   | ø133          | Normal      | 10.0                                    | 10.0 | 10.0 |
|                                                                                     |                   | ø133          | Strong      | 10.0                                    | 10.0 | 10.0 |
|                                                                                     | 51mm/<br>DN50     | ø89           | Normal      | 9.0                                     | 6.3  | 3.5  |
|                                                                                     |                   | ø89           | Strong      | 10.0                                    | 9.6  | 6.7  |
|                                                                                     |                   | ø133          | Normal      | 10.0                                    | 10.0 | 10.0 |
|                                                                                     |                   | ø133          | Strong      | 10.0                                    | 10.0 | 10.0 |
|                                                                                     | 63.5mm/<br>DN65   | ø133          | Normal      | 10.0                                    | 10.0 | 9.3  |
|                                                                                     |                   | ø133          | Strong      | 10.0                                    | 10.0 | 10.0 |
|                                                                                     | 76.1mm/<br>DN80   | ø133          | Normal      | 10.0                                    | 10.0 | 8.5  |
|                                                                                     |                   | ø133          | Strong      | 10.0                                    | 6.8  | 2.3  |
|                                                                                     | 101.6mm/<br>DN100 | ø133          | Normal      | 10.0                                    | 6.0  | -    |
|                                                                                     |                   | ø133          | Strong      | 10.0                                    | 10.0 | 6.5  |


F2 = Air - spring

F3 = Spring

NOTE! Max. recommended CIP pressure = 100 kPa (1 bar).

If actuator is supported by air on spring side; max allowable pressure is 300 kPa (3 bar)

## Dimensions (mm)

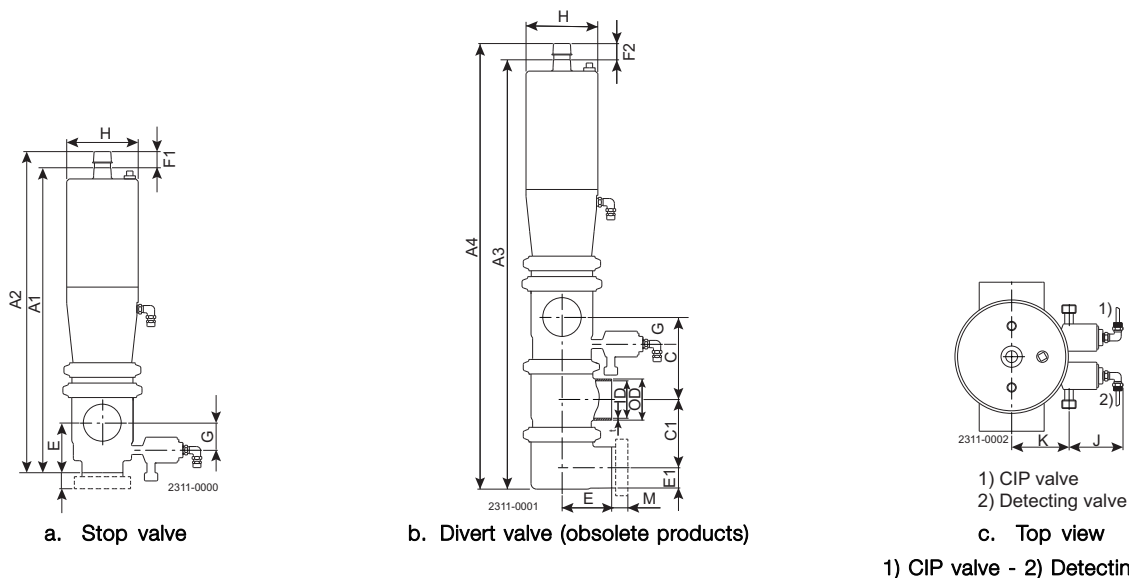

| Size                    | 38<br>mm | 51<br>mm | 63.5<br>mm | 76.1<br>mm | 101.6<br>mm | 40<br>DN | 50<br>DN | 65<br>DN | 80<br>DN | 100<br>DN |
|-------------------------|----------|----------|------------|------------|-------------|----------|----------|----------|----------|-----------|
| A <sub>1</sub>          | 371      | 381      | 459        | 481        | 553         | 369      | 379      | 456      | 482      | 552       |
| A <sub>2</sub>          | 385      | 395      | 473        | 501        | 573         | 383      | 393      | 470      | 502      | 572       |
| A <sub>3</sub>          | 511      | 532      | 642        | 677        | 778         | 511      | 532      | 642      | 693      | 778       |
| A <sub>4</sub>          | 525      | 546      | 662        | 697        | 798         | 525      | 546      | 662      | 713      | 798       |
| C                       | 90       | 102      | 124        | 129        | 157         | 90       | 102      | 124      | 134      | 157       |
| C <sub>1</sub>          | 80       | 84       | 108        | 115        | 150         | 80       | 84       | 108      | 120.5    | 150       |
| OD                      | 38       | 50.8     | 63.5       | 76.1       | 101.6       | 41       | 53       | 70       | 85       | 104       |
| ID                      | 34.9     | 47.6     | 60.3       | 72.1       | 97.6        | 38       | 50       | 66       | 81       | 100       |
| t                       | 1.6      | 1.6      | 1.6        | 2.0        | 2.0         | 1.5      | 1.5      | 2.0      | 2.0      | 2.0       |
| E                       | 49.5     | 61.5     | 82.3       | 87.3       | 133.5       | 49.5     | 61.5     | 82.3     | 87.3     | 133.5     |
| E <sub>1</sub>          | 20.5     | 26.8     | 33.2       | 39.1       | 51.8        | 22       | 28       | 36       | 43.5     | 53        |
| F <sub>1</sub>          | 14       | 14       | 14         | 20         | 20          | 14       | 14       | 14       | 20       | 20        |
| F <sub>2</sub>          | 14       | 14       | 20         | 20         | 20          | 14       | 14       | 20       | 20       | 20        |
| G                       | 27       | 33.3     | 39.7       | 45.6       | 58.3        | 28.5     | 34.5     | 42.5     | 50       | 59.5      |
| H                       | 89       | 89       | 89         | 133        | 133         | 89       | 89       | 89       | 133      | 133       |
| J                       | 46.7     | 46.7     | 57         | 66.6       | 84.3        | 46.7     | 46.7     | 57       | 66.6     | 84.3      |
| K                       | 63       | 63       | 63         | 63         | 63          | 63       | 63       | 63       | 63       | 63        |
| M/ISO clamp             | 21       | 21       | 21         | 21         | 21          |          |          |          |          |           |
| M/ISO male              | 21       | 21       | 21         | 21         | 21          |          |          |          |          |           |
| M/DIN male              |          |          |            |            | 22          | 23       | 25       | 25       | 30       |           |
| M/SMS male              |          | 20       | 20         | 24         | 24          | 35       |          |          |          |           |
| M/BS male               | 22       | 22       | 22         | 22         | 27          |          |          |          |          |           |
| Weight (kg): Stop valve | 6.5      | 6.8      | 13.3       | 14.9       | 18.2        | 6.5      | 6.8      | 13.3     | 15.6     | 18.2      |
| Divert valve            | 8.2      | 8.6      | 15.5       | 18.6       | 24.6        | 8.2      | 8.6      | 15.5     | 19.6     | 24.6      |

### Air Connections Compressed air:

R 1/8" (BSP), internal thread.

### CIP connection:

R 3/8" (BSP), external thread.

### Leakage connection:

R 3/8" (BSP), external thread.

### Caution, opening/closing time:

Opening/closing time will be affected by the following:

- The air supply (air pressure).
- The length and dimensions of the air hoses.
- Number of valves connected to the same air hose.
- Use of single solenoid valve for serial connected air actuator functions.
- Product pressure.

Alfa Laval reserves the right to change specifications without prior notification.

---

**How to contact Alfa Laval**

Contact details for all countries  
are continually updated on our website.  
Please visit [www.alfalaval.com](http://www.alfalaval.com) to  
access the information direct.