



Stainless steel Installation materials

S.K.S. keeps the right installation materials, pumps or equipment in stock no matter what the application, version or dimensions are. Our experience of the complete market of the light process industry is the base of our package. Despite the many differences in the finishing of the materials and the diversity of the materials and dimensions, SKS is able to deliver many products directly from stock. SKS is specialised in hygienic tube- and process components.

The total offer of all product groups is to divide into 3 groups. These groups are based on the application (the kind of process industry). We also have these subdivisions in our range. Within this groups the different components do match according the sizes and dimensions and the more specific requirements like the cleanability and finishing of the internal surface. The product groups are:



Pharma

All parts are adapted for this application which occurs especially within the pharmaceutical / aseptic industry. All the installation materials are according the standards, which are a stringent requirement within this industry. The other brand-related materials are produced especially for this application and classified by S.K.S. The pharma range is divided into 2 standards; ASME BPE (American) and DIN 11866 (European). These 2 groups are also divided into different dimensions, sizes and versions with varying surface roughness and materials. You can find more information about the different product properties in our documentation.



Food

The materials divided in this product group are manufactured especially for this application. The trend in this market is the standardized versions, but S.K.S also preserved the traditional sizes and delivery options.

Besides the complete range of installation materials, SKS is also the official distributor of the most leading brands regarding to valves, equipment and pumps. The complete range tube and process components for the food applications is shown in 3 different documentation brochures. This dividing is based on the 3 standards; DIN 11850, BS 4825, and ISO 2037. The DIN 11850 standard is the base of each modern process component, that's why the dimensions and sizes are the main differences between the products. Because the cleanability depends on the connections of the materials, a proper classification is an important tool. That is the reason why we have chosen this setting.



Industrial


The section of our package which we call 'industrial', consists of products whereby the cleanability is less, or not important. This package consists of components for utility- or waterworks, but also of construction materials. The industrial tube components are divided in two groups. The DIN/ISO series and the ANSI/ASTM series. Sometimes the diameter sizes are close together, that is the reason why this groups are often used together.

Within this product group cleanability of the products is not important, the materials are more robust.



| Productgroup | Pharma | Food | Industrial |
|-----------------------|--------------------------|--------------------------|--------------------------|
| Tube | • | • | • |
| Bend | • | • | • |
| Tee | • | • | • |
| Reducers | • | • | • |
| Connections | • | • | • |
| Construction material | - | - | • |
| Diverse | • | • | • |
| | deliverable n.a. - | deliverable n.a. - | deliverable n.a. - |

Application tubes

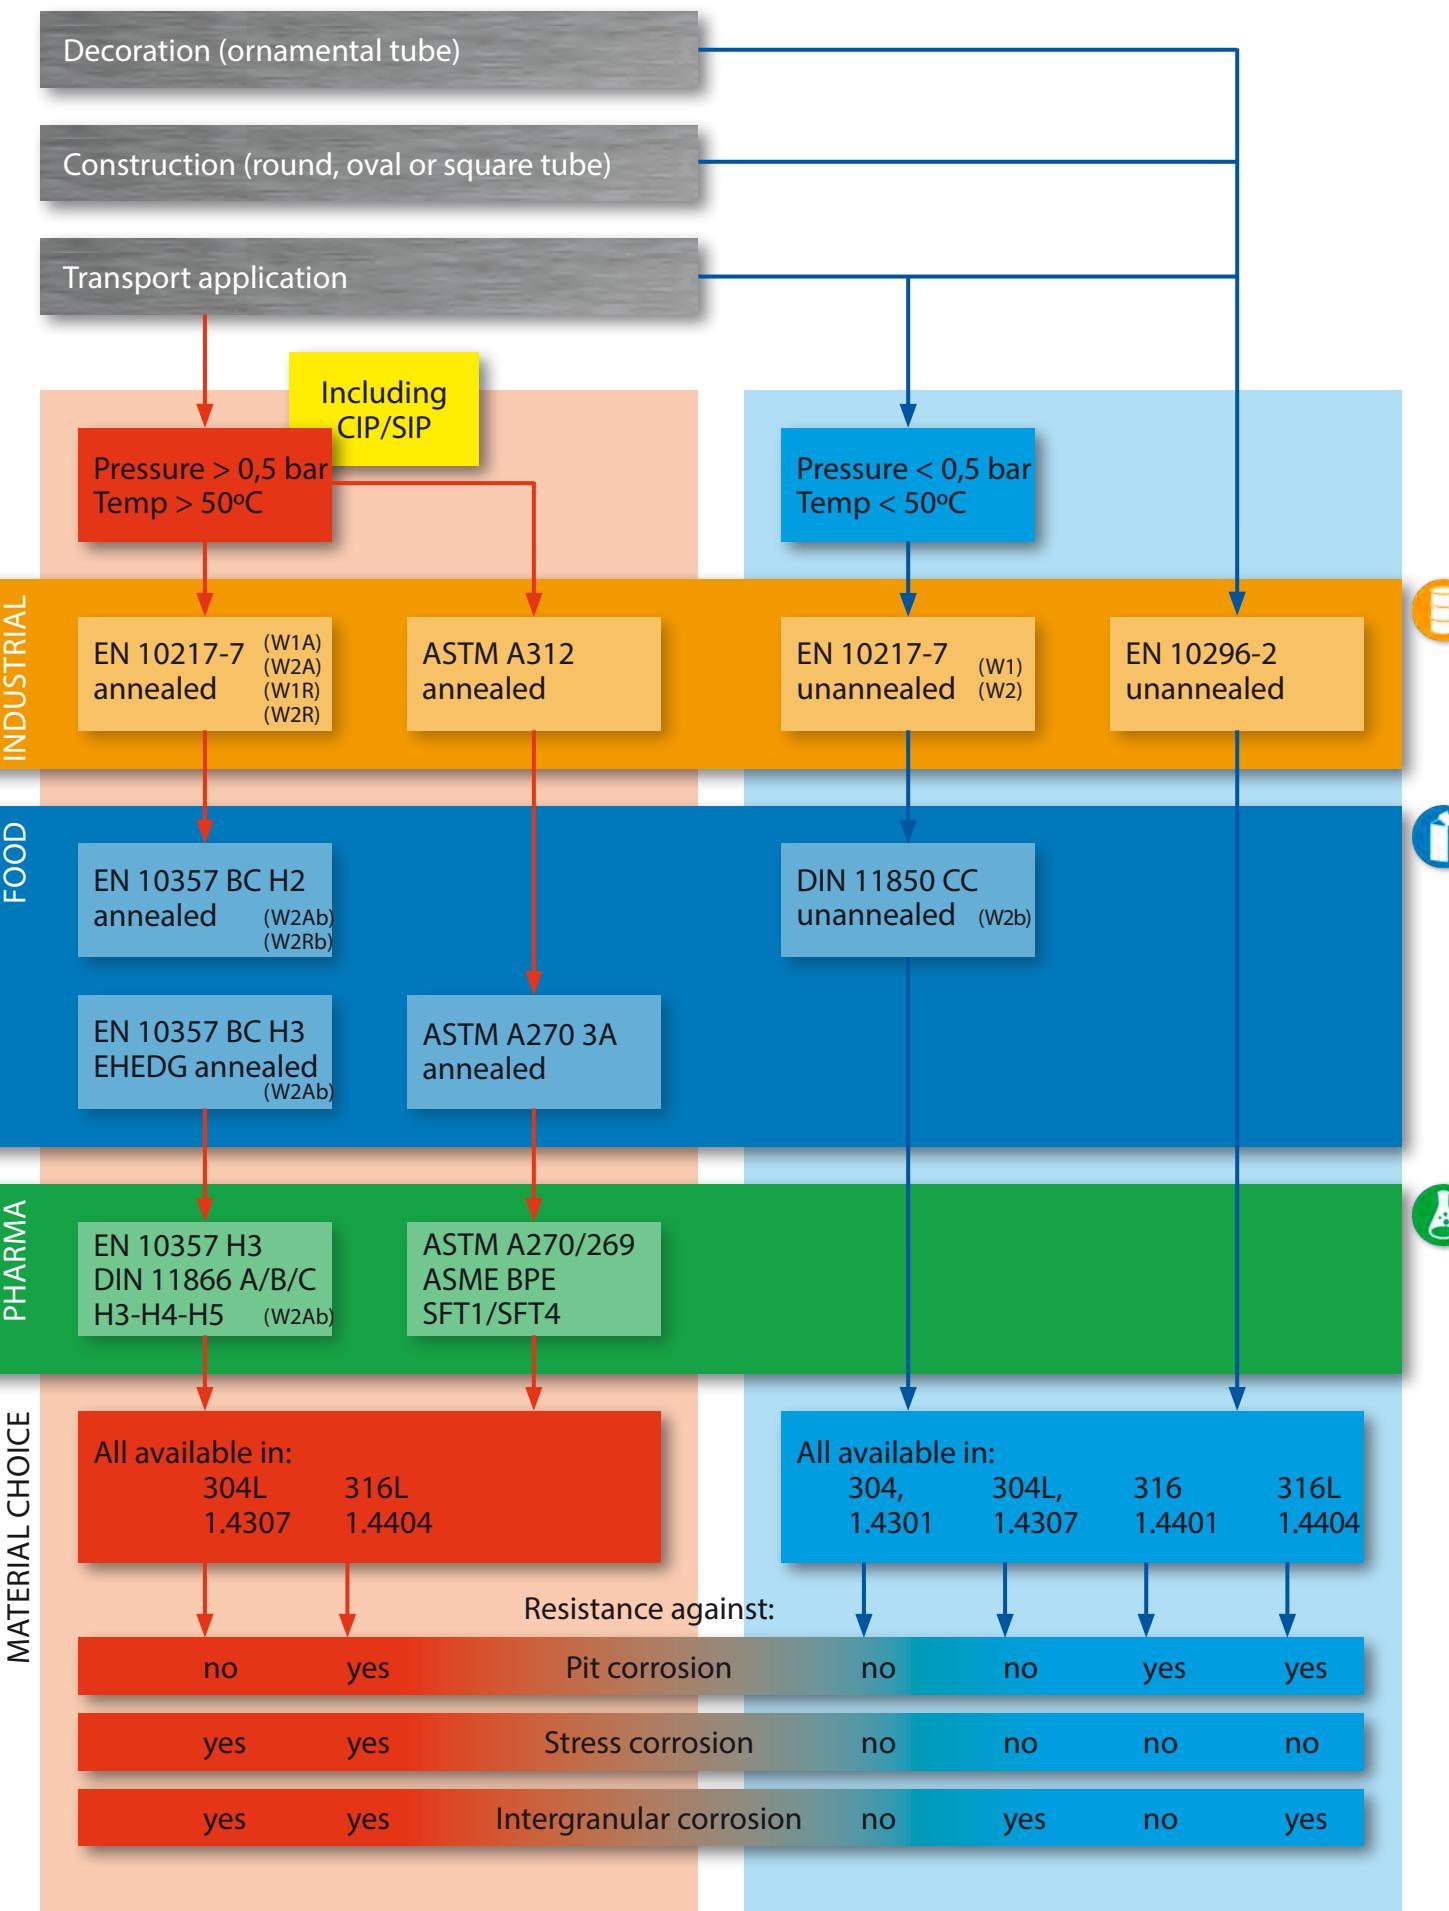

Besides the hygienic requirement, there is also a twofold requirement according the right choice of materials. This is the combination of pressure and temperature of the product. The choice depends on the official guidelines and off course the corrosion resistance. In the flow diagram on page 4 you can find a review according the choice for the right norm or material.

Further in this documentation you will find ther reviews. These reviews on page 10 and 11 could be your guidance to compile an integral tube system. If you step aside towards an other product range, it means that you directly change to other dimensions, tolerances, pressure reach, or even the internal surface finishing. In some cases, especially when there is a transition to other systems, you can't prevent this. In this case you have to keep in mind that the differences between the product ranges can be enormous.

The product groups can be divided into norm ranges below.

Product groups

Tubes

This product group is the biggest part of our stock and product flow of SKS. It also requires the most attention. We consider the tubes as the aorta of the process, that's why there are often stringent requirement.

As the central point in our chain we take the responsibility of our product range and the availability of it. Per application the range is divided in:

Pharma: All tubes are according the norms: ASME BPE (American) and DIN 11866 (European).

Food: The leading norm is the EN 10357(European).

This norm is the most current one and the most complete one.

Other dimension ranges like the ISO 2037 (SMS), BS 4825, A-270, the Dutch inch and the old DIN range are produced according the EN 10357 range.

Industrial: The tubes within this group are used for the other applications, like water-, drain-, steam tubes etc. But also as decoration or construction tubes. The 2 biggest groups are the DIN/ISO (European) and ASTM/ANSI (American).

Bends

For all dimension range there are welding bends available, but there are different kind of bends:

Pharma:

- Material: Only 316L (1.4404 / 1.4435) polished
- Connection: weld- or couplings. (see connections)
- Kind of bend: Short BS or long BL, 45°, 90° and 180°
- Radius/ mounting dimensions: By radius according the product norms.

Food:

- Material: 304L matt, or polished, 316L matt or polished
- Connection: weld- or couplings. (see connections)
- Kind of bend: Short BS or long BL, 45°, 90° and 180°
- Radius/ mounting dimensions: bends according norms, fixed radius according the norm Bends that haven't a norm often the radius varies per producer.

Industrial:

- Material: 304(L) and 316(L), both only matt
- Connection: weld- or thread connection (BSP)
- Kind of bend: Short BS meanly 90°
- Radius/ mounting dimensions: Various radius (ASTM of DIN/ISO)

Tees

For all dimensions there are tees available, but we distinguish some different versions.

Pharma:

- Material: Only 316L (1.4404 / 1.4435) polished
- Connection: weld- or couplings. (see connections)
- Kind of Tee: long TS, U piece or Instrument piece

Food:

- Material : 304L matt or polished, 316L matt or polished
- Connection: weld- or couplings. (see connections)
- Kind of Tee: short TK or long TS; standard, reducing, Teebend, Y-piece or cross piece

Industrial:

- Material : 304(L) and 316(L), both only matt
- Connection: weld- or thread connection (BSP)
- Kind of Tee: short TK or long TS; equal or reducing

Reducers

For all dimensions there are reducers available, but we distinguish some different versions.

Pharma:

- Material: Only 316L (1.4404 / 1.4435) polished
- Connection: weld- or couplings (see connections)
- Kind of reducer: Long (orbital weldable) Conical RK and Eccentric RE

Food:

- Material: 304L matt or polished, 316L matt or polished
- Connection: weld- or couplings (see connections)
- Kind of reducer: Short Conical RK and eccentric RE

Industrial:

- Material: 304(L) and 316(L), both only matt
- Connection: weld - or thread (BSP)
- Kind of reducer: Short Conical en Eccentric

Connections

Every application needs another connection, there are a lot of different connections available, but we distinguish some different versions.

Pharma:

- Material: Only 316L (1.4404 / 1.4435) polished
- Connection: weld (orbital weldable) or connection piece
- Kind of connection: Screw-, flange- (DIN 11864) or clamp connection (ASME BPE or DIN11864)

Food:

- Material: 304L or 316L
- Connection: Weld- or connectable (threaded male parts)
- Kind of connection: Screw-, flange- or clamp connection (all existing connections)

Industrial:

- Material: 304(L) and 316(L), both only matt
- Connection: weld- of connection piece (BSP thread, etc.)
- Kind of connection: Screw- or flange connections

Construction material

SKS provides a range of this kind of products to also fulfil the demand for it. The biggest part of this range is deliverable from stock.

- Square tubes and rectangular tubes
- Warm rolled and slit materials (flat, round, equal angle, hexagonal or square)
- Plates (finish 2b coated, perforated or diamond plate)
- Mounting materials

Various

This group is not a residual within the SKS package. Besides the other weld fittings, this group also contains articles that are complementary

to the process components. The group consist of:

- Convex bottoms
- Mounting materials
- Hoses and hose equipment
- Tools
- Complementary products
- Pipetite wall boot systems
- Pre-insulated tube systems

Besides the normed components there are a lot of materials available which aren't connected with a norm. A good example of this are the process components with the "Dutch inch" sizes. These materials are still applied en can be combined with the BS 4825 or ISO 2037 norm. Besides that combinations of food and pharma components or food and industrial components occurs. Below you can find a review which provides you information about which combinations can be made (vertical line).

| Pharma | | | | |
|----------------------|---------------------------|--------------------------|---------------------|----------------------------|
| Range | DIN (Europa) | ASTM (USA) | | |
| Tubes | DIN 11866 | ASME BPE | | |
| Weld fittings | DIN 11865 | ASME BPE | | |
| Couplings | DIN 11864-A-1 | ASME BPE Clamp | | |
| | DIN 11864-A-2 | | | |
| | DIN 11864-A-3 | | | |
| | DIN 11864-B-1 | | | |
| Also applicable | DIN 32676 Clamp (Range A) | DIN 11864-A (Range C) | | |
| | ASME BPE Clamp (Range C) | BS 4825-3 (Clamp) | | |
| | BS 4825-3 (Range C) | SKS koppeling (EHEDG) | | |
| | DIN 11853 (Range A) | | | |
| Food | | | | |
| Range | DIN (Europa) NW size | BS (British) Inches | ISO (International) | 3A (USA) Inches |
| Tubes | EN 10357-A | EN 10357-D | EN 10357-D | ASTM A-270 |
| Weld fittings | DIN 11852 | BS 4825-2 | ISO 2851 | ASME BPE |
| Couplings | DIN 11851 | BS 4825-3 Clamp | ISO 2852 clamp | ASME BPE clamp |
| | DIN 11853 | BS 4825-4 IDF | ISO 2853 IDF | |
| | DIN 32676 Clamp | BS 4825-5 RJT | | |
| Applicable couplings | SKS Coupling (EHEDG) | SKS Coupling (EHEDG) | SMS 1145 | DIN 11864-A Range C |
| | DIN 11864-A Range A | DIN 11851 Inch | SMS (French) | DIN 11851 Inch |
| | DIN 11864-B Range A | DIN 11864-A Range C | | |
| Industrial | | | | |
| Range | EN (DIN) | ISO | Metric (Trubore) | ANSI / ASTM |
| Tubes | EN 10217-7 | EN ISO 1127 | SSG 1361 | ANSIB36.19/ASTMA-312/312M |
| | EN 10296-2 | | | |
| Weld fittings | EN 10253-3 | EN ISO 5251 | Bend SSG 1362 | ANSI B16.9 / ASTM A-403 |
| | EN 10253-4 | Thread fittings EN 10241 | Tee SSG 1363 | BSP Thread fittings |
| | Thread fittings EN 10241 | | reducer SSG 1364 | |
| | | | Collar SSG 1366 | |
| | | | End cap SSG 1369 | |
| Couplings | EN 1092-1 Flanges | EN 1092-1 Flanges | EN 1092-1 Flanges | ANSIB16.5/ASTMA-182Flanges |
| | Bite ring couplings | Couplings EN 10241 | BSP couplings | BSP couplings |
| Applicable couplings | Various | DIN 11851 ISO | Various | Various |
| | | DIN 11864 Range B | | |
| | | Various | | |



| Part | Sort | Pharma | Food | Industrial |
|-------|---------------------|------------------------|--|--------------------------|
| Tubes | Welded tubes | ASME BPE SFT1 | EN 10357-A CC | EN 10296-2 |
| | | ASME BPE SFT4 | EN 10357-A BC H2 | EN 10217-7 W1 |
| | | DIN 11866 H3 | EN 10357 BC H3 (EHEDG) | EN 10217-7 W2b |
| | | DIN 11866 H4 | EN 10357-D SMS | ASTM A312 |
| | | DIN 11866 H5 | EN 10357-D BS 4825-1 ASTM A-270 3A EN 10357-D Dutch inch Old standard DIN 11850 | |
| | Seamless tubes | EN 10216-5 | - | EN 10216-5 |
| | | ASME BPE | - | ASTM A-312/A-530 |
| | | Only the smaller sizes | - | |
| | Machine tube | - | - | EN 10216-5 ASTM A-451 |
| | | | | |
| Bends | Welding bends 90° | ASME BPE SFF1 | DIN 11852 BS (kort) | EN 10253-3 (DIN 2605) |
| | | ASME BPE SFF4 | DIN 11852 BL (lang) | EN 10253-4 (DIN 2605) |
| | | DIN 11865 H3 | ISO 2851 (lang) | ASTM A-403 |
| | | DIN 11865 H4 | BS 4825-2 (lang) | Segmented bends |
| | | DIN 11865 H5 | ASTM A-270 3A Dutch inch Old standard DIN 11850 | |
| | Welding bends 45° | ASME BPE SFF1 | DIN 11852 BS (kort) | EN 10253-3 (DIN 2605) |
| | | ASME BPE SFF4 | DIN 11852 BL (lang) | EN 10253-4 (DIN 2605) |
| | | DIN 11865 H3 | ISO 2851 (lang) | ASTM A-403 |
| | | DIN 11865 H4 | BS 4825-2 (lang) | |
| | | DIN 11865 H5 | ASTM A-270 3A Old standard DIN 11850 | |
| | Welding bends 180° | ASME BPE SFF1 | DIN 11852 BS (Short) | - |
| | | ASME BPE SFF4 | Dutch inch | |
| | | - | Old standard DIN 11850 | |
| | Long radius bends | - | DIN 11852 5D Bends | ASTM A-403 LR |
| | | | Dutch inch 3D | |
| | | | DIN 11867 (Pigging) | |
| Tees | Tee (symmetric) | ASME BPE SFF1 | DIN 11852 TS | EN 10253-3 (DIN 2615) |
| | | ASME BPE SFF4 | ISO 2851 | EN10253-4(DIN261) |
| | | DIN 11865 H3 | BS 4825-2 | ASTM A-403 |
| | | DIN 11865 H4 | ASTM A-270 3A | |
| | | DIN 11865 H5 | Dutch inch Old standard DIN 11850 | |
| | Tee short | - | DIN 11852 TK | EN10253-3(DIN261) |
| | | - | ISO 2851 | EN10253-4(DIN261) |
| | | - | BS 4825-2 | ASTM A-403 |
| | | - | ASTM A-270 3A | |
| | | - | Dutch inch Old standard DIN 11850 | |
| | Reduced welding Tee | ASME BPE SFF1 | DIN 11852 TS and TK | EN 10253-3 (DIN 2615) |
| | | ASME BPE SFF4 | Dutch inch | EN 10253-4 (DIN 2615) |
| | | DIN 11865 H3 | Old standard DIN 11850 | ASTM A-403 |
| | | DIN 11865 H4 | of drawing | |
| | | DIN 11865 H5 | | |
| | Welding Tee bend | - | DIN 11852 R2 | - |
| | | - | Dutch inch | |
| | | - | Old standard DIN 11850 | |
| | Welding Y-piece | - | DIN 11852 R2 | - |
| | | - | Dutch inch | |
| | | - | Old standard DIN 11850 | |
| | Cross pieces | ASME BPE SFF1 | DIN 11852 R2 | - |
| | | ASME BPE SFF4 | Dutch inch | |
| | | - | Old standard DIN 11850 | |

Deliverable •
n.a. -Deliverable •
n.a. -Deliverable •
n.a. -

| Part | Sort | Pharma | Food | Industry | Industrial | Storage |
|-------------------|-----------------------|------------------------|------------------------|-----------------------|------------|---------|
| Reducers | Concentric | ASME BPE SFF1 | DIN 11852 RK | EN 10253-3 (DIN 2616) | | |
| | | ASME BPE SFF4 | ISO 2851 | EN10253-4(DIN261 | | |
| | | DIN 11865 H3 RK | BS 4825-2 | ASTM A-403 | | |
| | | DIN 11865 H4 RK | ASTM A-270 3A | | | |
| | | DIN 11865 H5 RK | Old standard DIN 11850 | | | |
| | Eccentric | ASME BPE SFF1 | DIN 11852 RK | EN 10253-3 (DIN | | |
| | | ASME BPE SFF4 | ISO 2851 | EN10253-4(DIN261 | | |
| | | DIN 11865 H3 RK | BS 4825-2 | ASTM A-403 | | |
| | | DIN 11865 H4 RK | ASTM A-270 3A | | | |
| | | DIN 11865 H5 RK | Old standard DIN 11850 | | | |
| Screw coupling | Weld coupling | DIN 11864-A-1 | DIN 11851 | BSP Flat sealin | | |
| | | DIN 11864-A-1 H4 | DIN 11853 | BSP Conical sealin | | |
| | | DIN 11864-B-1 H3 | DIN 11851 SKS | | | |
| | | DIN 11864-B-1 H4 | SMS (1145) | | | |
| | | | ISO 2853 IDF | | | |
| | | | BS 4825-4 IDF | | | |
| | | | BS 4825-5 RJT | | | |
| | | | DS | | | |
| | | | DIN 11851 | | | |
| | | | SMS (1145) | | | |
| Expanding union | in-/on screw coupling | - | DIN 11851 | | | |
| | | - | SMS (1145) | | | |
| | | - | DIN 11851 | BSPvlakdichter | | |
| | | | SMS (1145) | BSP conisch dichtend | | |
| | | | DIN 11851 | | | |
| | | | DIN 11853 | | | |
| | | | SMS (1145) | | | |
| | | | ISO 2853 IDF | | | |
| | | | BS 4825-4 IDF | | | |
| | | | BS 4825-5 RJT | | | |
| Hose connection | Blind parts | - | DS | | | |
| | | - | Diverse | | | |
| | | - | Diverse | | | |
| | | - | Diverse | | | |
| | | - | Diverse | | | |
| | | - | Diverse | | | |
| | | - | Diverse | | | |
| | | - | Diverse | | | |
| | | - | Diverse | | | |
| | | - | Diverse | | | |
| Rotating coupling | Tools | - | Diverse | | | |
| | | - | Diverse | | | |
| | | - | Diverse | | | |
| | | - | Diverse | | | |
| | | - | Diverse | | | |
| | | - | Diverse | | | |
| | | - | Diverse | | | |
| | | - | Diverse | | | |
| | | - | Diverse | | | |
| | | - | Diverse | | | |
| Clamp connection | Weld ferrules | ASME BPE SFF1 | ASME A-270 | | | |
| | | ASME BPE SFF4 | DIN 32676 | | | |
| | | DIN 11864-A-1 H3 | ISO 2852 | | | |
| | | DIN 11864-A-1 H4 | BS 4825-3 | | | |
| | | Diverse | Diverse | | | |
| | | Diverse | Diverse | | | |
| | | Diverse | Diverse | | | |
| | | Diverse | Diverse | | | |
| | | Diverse | Diverse | | | |
| | | Diverse | Diverse | | | |
| Flange connection | Clamp seal | DIN 11864-A-2 H3 | Various | | | |
| | | DIN 11864-A-1 H4 | Varivent | | | |
| | | | FGN Flanges | | | |
| | | | DIN Version | | | |
| | | | DIN 1092-1 type 01 | | | |
| | | | Dutch Inch Version | | | |
| | | | EN 1092-1 type 02 A | | | |
| | | | EN 1092-1 type 05 | | | |
| | | | ASTM A-182 | | | |
| | | | EN 1092-1 type 33 | | | |
| Thread fittings | Various | DIN 11864-A-2 H3 | EN 1092-1 type 33 | | | |
| | | DIN 11864-A-1 H4 | EN 1092-1 type 05 | | | |
| | | DIN 11864-A-1 H4 | EN 1092-1 type 02 A | | | |
| | | Collars | EN 1092-1 type 33 | | | |
| | | Thread flange | - | | | |
| | | Flange gasket | Diverse | | | |
| | | Diverse | Various | | | |
| | | Diverse mogelijkheden | Various possibilities | | | |
| | | | BSP | | | |
| | | | NPTBite ring | | | |
| End caps | divers | ASME BPE SFF1 | DIN 11850 R2 | ASTM A-403 | | |
| | | ASME BPE SFF4 | Dutch inch (DIN 11850) | DIN / ISO | | |
| | | Old standard DIN 11850 | | | | |

Deliverable •
n.a. -Deliverable •
n.a. -Deliverable •
n.a. -

| Part | Sort | Pharma | Food | Industry | Industrial | Storage |
|---------------|------------------------|---------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Couple pieces | Bends | | Various possibilities | Various possibilities | Various possibilities | Various possibilities |
| | Tees | | Various possibilities | Various possibilities | Various possibilities | Various possibilities |
| | Reducers | | Various possibilities | Various possibilities | Various possibilities | Various possibilities |
| Tube | Square | - | - | - | EN 10219-1 | |
| | Rectangular | - | - | - | EN 10219-2 | |
| | | | | | EN 10219-1 | |
| Mill products | Flat bars | | - | - | EN 10051 | |
| | | | | | Slotted | |
| | Round bars | - | - | | Warmrolled | |
| Plate | Square | - | - | | EN 10051 | |
| | Hexagonal | | | | EN 10051 | |
| | Equal angle material | - | - | | EN 10051 | |
| Plate | Coated | - | - | | Cold rolled | |
| | Perforated | - | - | | Warm rolled | |
| | | | | | Round | |
| Support | Diamonds plate | - | - | | Slot | |
| | Pipe support | | Heavy | version | Heavy version | |
| | | Light version | | Light version | | Light version |
| Complementary | Isolation | | PTS program | | PTS program | |
| | Pipetite | | Wall boot systems | | Wall boot systems | |
| | Pipe sawing tools | | All dimensions | | All dimensions | Limited dimensions |
| Complementary | Wall sheet | | | beperkt programma | beperkt programma | |
| | Complementary products | | Pickle paste | | Pickle paste | |
| | | | Scotch Brite | Scotch Brite | Scotch Brite | |
| | | | Polish material | Polish material | Polish material | |
| | | | Form plug | Form plug | Form plug | |
| | | | Mounting materials | Mounting materials | Mounting materials | |
| | | | Plastic plugs | Plastic plugs | Plastic plugs | |

Deliverable
n.a.Deliverable
n.a.Deliverable
n.a.

Guidance for uniform tube system

| | | Pharma | | | | | | |
|---------------------|-------------|---------------|----------------|----------------|------------------|---------------------|----------------|----------------|
| | | Bio-pharm | | | | Pharma (High clean) | | |
| Sort | Version | BPE SET4 | DIN 11866-A H4 | DIN 11866-B H4 | DIN 11866-C H4 | BPE SET1 | DIN 11866-A H3 | DIN 11866-B H3 |
| Tubes | | <0,375 µm | <0,4 µm | <0,4 µm | <0,4 µm | <0,5 µm | <0,8 µm | <0,8 µm |
| Welding bends BS | BS | Stock | Stock | Stock | Stock | Stock | Stock | Stock |
| Welding bends BL | BL | SFF4 | DIN 11865 | DIN 11865 | DIN 11865 / SFF1 | SFF1 | DIN 11865 | DIN 11865 |
| Tee TK | TK | - | - | - | - | - | - | - |
| Tee TS | TS | SFF4 | DIN 11865 | DIN 11865 | DIN 11865 / SFF1 | SFF1 | DIN 11865 | DIN 11865 |
| Tee reducing | | SFF4 | DIN 11865 | DIN 11865 | DIN 11865 / SFF1 | SFF1 | DIN 11865 | DIN 11865 |
| Reducer conical | RK | SFF4 | DIN 11865 | DIN 11865 | DIN 11865 / SFF1 | SFF1 | DIN 11865 | DIN 11865 |
| Reducer eccentric | RE | SFF4 | DIN 11865 | DIN 11865 | DIN 11865 / SFF1 | SFF1 | DIN 11865 | DIN 11865 |
| Cross piece | | SFF4 | - | - | SFF4 | SFF1 | - | - |
| Teebend | | - | - | - | - | - | - | - |
| Y-piece | | - | - | - | - | - | - | - |
| Thread fittings | BSP | - | - | - | - | - | - | - |
| Bite ring couplings | | - | - | - | - | - | - | - |
| Couple pieces | | SFF4 | DIN 11865 | DIN 11865 | DIN 11865 / SFF1 | SFF1 | DIN 11865 | DIN 11865 |
| Screw coupling | DIN 11851 | - | - | - | - | - | DIN 11851 | DIN 11851 |
| | DIN 11853 | - | - | - | - | - | DIN 11853 | DIN 11853 |
| | DIN 11864-A | DIN 11864-A-1 | DIN 11864-A-1 | DIN 11864-A-1 | DIN 11864-A-1 | DIN 11864-A-1 | DIN 11864-A-1 | DIN 11864-A-1 |
| | DIN 11864-B | DIN 11864-B-1 | DIN 11864-B-1 | DIN 11864-B-1 | DIN 11864-B-1 | DIN 11864-B-1 | DIN 11864-B-1 | DIN 11864-B-1 |
| | SMS | - | - | - | - | - | - | - |
| | IDF | - | - | - | - | - | - | - |
| | RJT | - | - | - | - | - | - | - |
| | BSP | - | - | - | - | - | - | - |
| | SKS seal | - | - | - | - | - | DIN 11851 | DIN 11851 |
| Clamp coupling | ISO 2853 | - | - | - | - | - | - | - |
| | BS4825 | - | - | - | - | - | - | - |
| | ASME BPE | SFF4 | - | - | SFF4 | SFF1 | - | - |
| | DIN 11864-A | DIN 11864-A-3 | DIN 11864-A-3 | DIN 11864-A-3 | DIN 11864-A-3 | DIN 11864-A-3 | DIN 11864-A-3 | DIN 11864-A-3 |
| | DIN 32767 | - | - | - | - | - | DIN 32676 | - |
| Flange connection | DIN 11850 | - | - | - | - | - | - | - |
| | DIN 11864-A | DIN 11864-A-2 | DIN 11864-A-2 | DIN 11864-A-2 | DIN 11864-A-2 | DIN 11864-A-2 | DIN 11864-A-2 | DIN 11864-A-2 |
| | DIN 11864-B | DIN 11864-B-2 | DIN 11864-B-2 | DIN 11864-B-2 | DIN 11864-B-2 | DIN 11864-B-2 | DIN 11864-B-2 | DIN 11864-B-2 |
| | DIN 11853 | - | - | - | - | - | DIN 11853 | DIN 11853 |
| | EN-1092 | - | - | - | - | - | - | - |
| | ANSI | - | - | - | - | - | - | - |



| | | Food | | | | | | | Industrial | |
|-----------------|----------------|---------------|---------------|---------------|------------------------|--------------|-------------|-----------|----------------|--|
| | H3 EHEDG | Standard food | | | | Dutch Inch | Old DIN | EN 10217 | ASTM/ANSIA-312 | |
| | DIN 11866-C H3 | EN 10357-A H3 | EN 10357-D H2 | EN 10357-C | EN 10357-D BS 4825(| EN 10357-D | No norm | | | |
| <0,8 µm | <0,8 µm | <0,8/1,6 µm | <1,6 µm | <1,6 µm | <0,8/1,6 µm | <0,8/1,6 µm | <0,8/1,6 µm | Stock | Stock | |
| Stock | Stock | Stock | Stock | Stock | Stock | Stock | Stock | Stock | A-403 | |
| - | - | DIN11852 | - | - | No norm | No norm | No norm | EN 10253 | A-403 | |
| DIN 11865 / SFF | DIN 11865 | DIN11852 | ISO 2851 | BS 4825 | BS and ISO | No norm | No norm | - | - | |
| - | - | DIN11852 | No norm | BS 4825 | BS and ISO | No norm | No norm | EN 10253 | A-403 | |
| DIN 11865 / SFF | DIN 11865 | DIN11852 | ISO 2851 | BS 4825 | BS and ISO | No norm | No norm | EN 10253 | A-403 | |
| DIN 11865 / SFF | DIN 11865 | No norm | No norm | No norm | BS and ISO | No norm | No norm | EN 10253 | A-403 | |
| DIN 11865 / SFF | DIN 11865 | DIN 11852 | No norm | No norm | BS and ISO | No norm | No norm | EN 10253 | A-403 | |
| DIN 11865 / SFF | DIN 11865 | DIN 11852 | No norm | No norm | BS and ISO | No norm | No norm | EN 10253 | A-403 | |
| SFF1 | - | No norm | No norm | No norm | BS and ISO | No norm | - | - | - | |
| - | - | No norm | No norm | No norm | BS and ISO | No norm | - | - | - | |
| - | - | No norm | No norm | No norm | BS and ISO | No norm | - | - | - | |
| - | - | - | - | - | - | - | BSP | BSP | | |
| - | - | - | - | - | - | - | • | • | | |
| DIN 11865 / SFF | DIN 11865 | No norm | No norm | No norm | maatwerk | maatwerk | - | - | - | |
| DIN 11851 | DIN 1185 1 | DIN 11851 | - | DIN 11851 | DIN 11851 | DIN 11851 | DIN 11851 | DIN 11851 | DIN 11851 | |
| DIN 11853 | DIN 11853 | DIN 11853 | - | DIN 11853 | - | - | - | - | - | |
| DIN 11864-A-1 | DIN 11864-A | DIN 11864-A-1 | - | DIN 11864-A-1 | - | - | - | - | - | |
| DIN 11864-B-1 | DIN 11864-B | DIN 11864-B-1 | - | DIN 11864-B-1 | - | - | - | - | - | |
| - | - | - | ISO 3005 | - | ISO3005 | - | - | - | - | |
| - | - | - | ISO 2852 | BS 4825 | BS en ISO | - | - | - | - | |
| - | - | - | - | BS 4825 | BS 4825 | - | - | - | - | |
| - | - | - | - | - | - | - | BSP | BSP | | |
| DIN 11851 | DIN 11851 | DIN 11851 | - | DIN 11851 | DIN 11851 | - | - | - | - | |
| - | - | - | ISO 2853 | - | ISO 2853 | - | - | - | - | |
| - | - | - | - | BS 4825 | BS 4825 | - | - | - | - | |
| SFT1 | - | - | - | SFT1 | SFT1 | - | - | - | - | |
| DIN 11864-A-3 | DIN 11864-A-3 | DIN 11864-A-3 | - | DIN 11864-A-3 | - | - | - | - | - | |
| - | DIN 32676 | DIN 32676 | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | - | |
| DIN 11864-A-2 | DIN 11864-A-2 | DIN 11864-A-2 | - | DIN 11864-A-2 | - | - | - | - | - | |
| DIN 11864-B-2 | DIN 11864-B-2 | DIN 11864-B-2 | - | DIN 11864-B-2 | - | - | - | - | - | |
| DIN 11853 | DIN 11853-2 | DIN 11853-2 | - | DIN 11853-2 | - | - | - | - | - | |
| - | - | Plate flange | - | Plate flange | Customised | Plate flange | EN-1092 | EN-1092 | | |
| - | - | - | - | - | - | - | ANSI | ANSI | | |

Deliverable n.a.

Deliverable n.a.

Deliverable n.a.



Package options

Because the wishes or requirements, according the packaging of tubes, can be different from each other, S.K.S. provides 5 different possibilities. These possibilities distinguish themselves in price but also in the protection of the tube. In the review below you can find the differences between the packaging



A

Code A: Bundle

The way of packaging is a bundle. SKS packs together a quantity of tubes with a stainless steel or plastic tie to prevent corrosion. The ends are covered to be protected against the polluting of the tubes.



F

Code F: Closed wooden case ISPM-15

The optimal protection for your tubes is a closed wooden case. SKS has a standard closed case that is seaworthy, internal covered with plastic and provided with the ISPM mark. There are different sizes regarding to the height and width of the cases. Depending on the quantity, the right case will be selected.



C

Code C: Supported bundle

This kind of packaging provides more protection because the bundle (A) is supported with a wooden frame. The bundle can be moved in an other way than with only a strop. This to avoid the damaging of the tubes when moving them. The dimensions are variable and depend on the size of the bundle.



D

Code D: Open wooden case

An open wooden case provides enough protection against damaging the tubes during the transport. Thanks to the closed ends the tubes are good protected. The case will be strengthened with stainless steel ties and is stackable. There are different sizes regarding to the height and width of the cases. Depending on the quantity, the right case will be selected.

The cases with the D-code are used with export orders.

SIZE RANGES

| Nominal Diameter DN | Industrial | | | | | | Food | | | | | | Pharma | | | | | | | | | | | |
|---------------------------|-----------------|-------------|-------|----|------|------|--------------------|-------------------------|-----------------------|----------------------|---------------------|---------------|---------------------|------|----------------------------|---------------|---------------|---------------------------|--------|--------|--------|-------|--|--|
| | ANSI B 36.19 | EN ISO 1127 | Serie | 1 | 2 | 3 | SSG 1361 Metric | Hydraul Seaml, mm | DIN 11850 OD mm | ISO 2037 OD mm | BS 4825 OD mm | Dutch Inch | A-270 OD Inch | | DIN 11866 Range A mm | Range B mm | Range C mm | ASME BPE A-270 Inch | | | | | | |
| 4 | | | | | 6 | | | 6 | | | | | | | | | | | | | | | | |
| 6 | | | | | 8 | | | | | | | | | | 8 | | | 6,35 | 1/4" | 6,35 | | | | |
| 8 | 1/8" | 10,3 | 10,2 | 10 | | | 10 | 10 | | | | | | | 10 | 10,2 | | 9,53 | 3/8" | 9,53 | | | | |
| | | | | | 12 | | | 12 | | | | | | | | | | 12,7 | 1/2" | 12,7 | | | | |
| | 1/4" | 13,7 | 13,5 | | | | | | | | | | | | | | | 13,5 | | | | | | |
| 10 | | | | | 14 | | | 15 | 12 | | | | | | | | 13 | | 5/8" | 15,88 | | | | |
| | | | | | 16 | | | 16 | 16 | 13 | | | | | | | | 17,2 | | | | | | |
| 15 | | | | | 18 | | | 18 | 18 | | | | | | 19,05 | | 3/4" | 19,05 | 19,05 | 3/4" | 19,05 | | | |
| | | | | | 19 | | | | | 19 | | | | | | | | | | | | | | |
| | | | | | 20 | | | 20 | 20 | | | | | | | | | | | | | | | |
| | 1/2" | 21,3 | 21,3 | | | | | | | | | | | | | | | 21,3 | | | | | | |
| 20 | | | | | 22 | | | 22 | 22 | | | | | | | | | 23 | | | | | | |
| | | | | | 23 | | | | 23 | | | | | | | | | | | | | | | |
| | | | | | 25 | | | 25 | 25 | | | | | | 25 | | 25,4 | 25,4 | 1" | 25,4 | | | | |
| | | | | | 25,4 | | | | | | | | | | | | | 26,9 | | | | | | |
| 25 | | | | | 28 | 28 | | 28 | | | | | | | | | | | | | | | | |
| | | | | | 30 | 30 | 30 | 29 | | | | | | | | | 29 | | | | | | | |
| | | | | | 31,8 | | | | | | | | | | | | | | 1 1/4" | 31,8 | | | | |
| 32 | 1" | 33,4 | 33,7 | 32 | | | | | | | | | | | 32 | | | | 33,7 | | | | | |
| | | | | | 35 | 35 | | 35 | | | | | | | | | | | | | | | | |
| | | | | | 38 | | | 38 | 38 | | | | | | 38 | 38,1 | 38,1 | 1 1/2" | 38,1 | | | | | |
| | 1 1/4" | 42,2 | 42,4 | 40 | | | | | | | | | | | | | | | 42,4 | | | | | |
| 40 | | | | | 43 | | | 43 | | | | | | | 40 | | | | | | | | | |
| | | | | | 44,5 | 44 | | | | | | | | | 41 | | | | 1 3/4" | 44,5 | | | | |
| | | | | | 44,5 | | | | | | | | | | | | | | | | | | | |
| 50 | 1 1/2" | 48,3 | 48,3 | | | | | | | | | | | | | | | 48,3 | | | | | | |
| | | | | | 51 | | | 50 | 52 | 51 | 50,8 | 50,8 | 2" | 50,8 | | | | 50,8 | 2" | 50,8 | | | | |
| | | | | | 53 | | | 53 | | | | | | | | | 53 | | | | | | | |
| | | | | | 54 | 54 | | | | | | | | | | | | | | | | | | |
| | 2" | 60,3 | 60,3 | | | | | | | | | | | | | | | 60,3 | | | | | | |
| 65 | | | | | 63,5 | | | 68 | 60 | | | | | | 63,5 | 63,5 | 63,5 | 2 1/2" | 63,5 | 2 1/2" | 63,5 | | | |
| | | | | | 70 | | | 69 | 65 | 70 | | | | | | | | 70 | | | | | | |
| | | | | | 73,0 | | | | | | | | | | | | | | | | | | | |
| 80 | | | | | 76,1 | | | 82,5 | 83/84 | | 85 | | | | 76,1 | 76,2 | 76,1 | 3" | 76,2 | 76,1 | 76,2 | 76,2 | | |
| | | | | | 88,9 | 88,9 | | | | | | | | | | | | 88,9 | | 3 1/2" | 88,9 | | | |
| 100 | 3 1/2" | 101,6 | 101,6 | | | | | 103/104 | | 104 | | | | | 101,6 | 101,6 | 101,6 | 4" | 101,6 | 4" | 101,6 | | | |
| | | | | | | | | | | | | | | | | | | 104 | | | | | | |
| | 4" | 114,3 | 114,3 | | | | | | | | | | | | | | | 114,3 | | 4 1/2" | 114,3 | | | |
| 125 | | | | | | | | 128/129 | | 129 | | | | | | | | 129 | | 5" | 127,0 | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | |
| 150 | 5" | 141,3 | 139,7 | | | | | | | | | | | | | | | | 139,7 | | 5 1/2" | 139,7 | | |
| | | | | | | | | | | | | | | | | | | | | | | | | |
| | 6" | 168,3 | 168,3 | | | | | | | | | | | | | | | | 168,3 | | | | | |
| 200 | | | | | | | | 204 | | 204 | | | | | | | | | | | | | | |
| | 8" | 219,1 | 219,1 | | | | | | | | | | | | | | | | | | | | | |
| 250 | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | 254 | | | | | | | | | | | | | | | | |
| 300 | 10" | 273,0 | 273,0 | | | | | | | | | | | | | | | | | | | | | |
| | 12" | 323,9 | 323,9 | | | | | | | | | | | | | | | | | | | | | |

Bigger sizes only available in industrial version.

FLOW

| NW | 10 | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 |
|---|------------------------|--------|--------|--------|--------|--------|--------|-------|-------|--------|--------|--------|
| Dimensions mm | 13x1,5 | 19x1,5 | 23x1,5 | 29x1,5 | 35x1,5 | 41x1,5 | 53x1,5 | 70x2 | 85x2 | 104x2 | 129x2 | 154x2 |
| d = int. diameter mm | 10 | 16 | 20 | 25 | 32 | 38 | 50 | 66 | 81 | 100 | 125 | 150 |
| Volume l/m C=d ² x0,0007854 | 0,08 | 0,20 | 0,31 | 0,49 | 0,80 | 1,13 | 1,96 | 3,42 | 5,15 | 7,85 | 12,27 | 17,67 |
| Empty weight kg/m | 0,432 | 0,657 | 0,808 | 1,033 | 1,258 | 1,484 | 1,934 | 3,405 | 4,157 | 5,108 | 6,360 | 7,612 |
| Weightwithwaterkg/m | 0,51 | 0,86 | 1,12 | 1,52 | 2,06 | 2,62 | 3,90 | 6,83 | 9,31 | 12,96 | 18,63 | 25,28 |
| Speed m/s | Flow m ³ /h | | | | | | | | | | | |
| 0,5 | 0,14 | 0,36 | 0,57 | 0,88 | 1,36 | 1,94 | 3,39 | 6,16 | 9,28 | 14,14 | 22,09 | 31,81 |
| 0,6 | 0,17 | 0,43 | 0,68 | 1,06 | 1,63 | 2,32 | 4,07 | 7,39 | 11,13 | 16,96 | 26,51 | 38,17 |
| 0,7 | 0,20 | 0,51 | 0,79 | 1,24 | 1,90 | 2,71 | 4,75 | 8,62 | 12,99 | 19,79 | 30,93 | 44,53 |
| 0,8 | 0,23 | 0,58 | 0,90 | 1,41 | 2,17 | 3,10 | 5,43 | 9,85 | 14,84 | 22,62 | 35,34 | 50,89 |
| 0,9 | 0,25 | 0,65 | 1,02 | 1,59 | 2,45 | 3,48 | 6,11 | 11,08 | 16,70 | 25,45 | 39,76 | 57,26 |
| 1 | 0,28 | 0,72 | 1,13 | 1,77 | 2,72 | 3,87 | 6,79 | 12,32 | 18,55 | 28,27 | 44,18 | 63,62 |
| 1,1 | 0,31 | 0,80 | 1,24 | 1,94 | 2,99 | 4,26 | 7,47 | 13,55 | 20,41 | 31,10 | 48,60 | 69,98 |
| 1,2 | 0,34 | 0,87 | 1,36 | 2,12 | 3,26 | 4,64 | 8,15 | 14,78 | 22,26 | 33,93 | 53,01 | 76,34 |
| 1,3 | 0,37 | 0,94 | 1,47 | 2,30 | 3,53 | 5,03 | 8,83 | 16,01 | 24,12 | 36,76 | 57,43 | 82,70 |
| 1,4 | 0,40 | 1,01 | 1,58 | 2,47 | 3,80 | 5,42 | 9,50 | 17,24 | 25,97 | 39,58 | 61,85 | 89,06 |
| 1,5 | 0,42 | 1,09 | 1,70 | 2,65 | 4,08 | 5,81 | 10,18 | 18,47 | 27,83 | 42,41 | 66,27 | 95,43 |
| 1,6 | 0,45 | 1,16 | 1,81 | 2,83 | 4,35 | 6,19 | 10,86 | 19,71 | 29,68 | 45,24 | 70,69 | 101,79 |
| 1,7 | 0,48 | 1,23 | 1,92 | 3,00 | 4,62 | 6,58 | 11,54 | 20,94 | 31,54 | 48,07 | 75,10 | 108,15 |
| 1,8 | 0,51 | 1,30 | 2,04 | 3,18 | 4,89 | 6,97 | 12,22 | 22,17 | 33,39 | 50,89 | 79,52 | 114,51 |
| 1,9 | 0,54 | 1,38 | 2,15 | 3,36 | 5,16 | 7,35 | 12,90 | 23,40 | 35,25 | 53,72 | 83,94 | 120,87 |
| 2 | 0,57 | 1,45 | 2,26 | 3,53 | 5,43 | 7,74 | 13,58 | 24,63 | 37,10 | 56,55 | 88,36 | 127,23 |
| 2,1 | 0,59 | 1,52 | 2,36 | 3,71 | 5,71 | 8,13 | 14,26 | 25,86 | 38,96 | 59,38 | 92,78 | 133,60 |
| 2,2 | 0,62 | 1,59 | 2,49 | 3,89 | 5,98 | 8,52 | 14,94 | 27,10 | 40,81 | 62,20 | 97,19 | 139,96 |
| 2,3 | 0,65 | 1,66 | 2,60 | 4,06 | 6,25 | 8,90 | 15,61 | 28,33 | 42,67 | 65,03 | 101,61 | 146,32 |
| 2,4 | 0,68 | 1,74 | 2,71 | 4,24 | 6,52 | 9,29 | 16,29 | 29,56 | 44,52 | 67,86 | 106,03 | 152,68 |
| 2,5 | 0,71 | 1,81 | 2,83 | 4,42 | 6,79 | 9,68 | 16,97 | 30,79 | 46,38 | 70,69 | 110,45 | 159,04 |
| 2,6 | 0,74 | 1,88 | 2,94 | 4,59 | 7,06 | 10,06 | 17,65 | 32,02 | 48,23 | 73,51 | 114,86 | 165,40 |
| 2,7 | 0,76 | 1,95 | 3,05 | 4,77 | 7,34 | 10,45 | 18,33 | 33,25 | 50,09 | 76,34 | 119,28 | 171,77 |
| 2,8 | 0,79 | 2,03 | 3,17 | 4,95 | 7,61 | 10,84 | 19,01 | 34,49 | 51,94 | 79,17 | 123,70 | 178,13 |
| 2,9 | 0,82 | 2,10 | 3,28 | 5,12 | 7,88 | 11,23 | 19,69 | 35,72 | 53,80 | 82,00 | 128,12 | 184,49 |
| 3 | 0,85 | 2,17 | 3,39 | 5,30 | 8,15 | 11,61 | 20,37 | 36,95 | 55,65 | 84,82 | 132,54 | 190,85 |
| 3,1 | 0,88 | 2,24 | 3,51 | 5,48 | 8,42 | 12,00 | 21,04 | 38,18 | 57,51 | 87,65 | 136,95 | 197,21 |
| 3,2 | 0,90 | 2,32 | 3,62 | 5,65 | 8,69 | 12,39 | 21,72 | 39,41 | 59,36 | 90,48 | 141,37 | 203,58 |
| 3,3 | 0,93 | 2,39 | 3,73 | 5,83 | 8,97 | 12,77 | 22,40 | 40,64 | 61,22 | 93,31 | 145,79 | 209,94 |
| 3,4 | 0,96 | 2,46 | 3,85 | 6,01 | 9,24 | 13,16 | 23,08 | 41,88 | 63,07 | 96,13 | 150,21 | 216,30 |
| 3,5 | 0,99 | 2,53 | 3,96 | 6,19 | 9,51 | 13,55 | 23,76 | 43,11 | 64,93 | 98,96 | 154,63 | 222,66 |
| 3,6 | 1,02 | 2,61 | 4,07 | 6,36 | 9,78 | 13,93 | 24,44 | 44,34 | 66,78 | 101,79 | 159,04 | 229,02 |
| 3,7 | 1,05 | 2,68 | 4,18 | 6,54 | 10,05 | 14,32 | 25,12 | 45,57 | 68,64 | 104,62 | 163,46 | 235,38 |
| 3,8 | 1,07 | 2,75 | 4,30 | 6,72 | 10,33 | 14,71 | 25,80 | 46,80 | 70,49 | 107,44 | 167,88 | 241,75 |
| 3,9 | 1,10 | 2,82 | 4,41 | 6,89 | 10,60 | 15,10 | 26,48 | 48,03 | 72,35 | 110,27 | 172,30 | 248,11 |
| 4 | 1,13 | 2,90 | 4,52 | 7,07 | 10,87 | 15,48 | 27,15 | 49,27 | 74,20 | 113,10 | 176,71 | 254,47 |

| | NBR | HNBR | EPDM | MVQ | FPM / FKM |
|---------------------|----------------------------------|----------------|-----------------------------------|---------------------------|---------------------|
| Market name | Perbunan / Buna-N / Nitrilrubber | HNBR | EPDM | Silicone | Viton |
| Official name | Acrylnitril-Butaene rubber | Hydrated NBR | Ethylene-Propyleen-Diene Monomeer | Dimethyi siliconen rubber | Fluor Carbon rubber |
| Color | Blue / White | Yellow | Black | Red/Transparentwhite | Green / black |
| FDA approval | FDA/BgVV XXI | FDA/BgVV XV | FDA/BgVV XXI | FDA/BgVV XXI | FDA/BgVV XXI |
| Operating temp. Ca. | -20° C - 100°C | -25° C - 100°C | -40° C - 130°C | -30° C - 120°C | -25° C - 220°C |
| | Short 130°C | Short 140°C | Short 140°C | Short 120°C | |
| Resistance | | | | | |
| Vapor | X | ++ | ++ | X | X |
| Steam | - | + | ++ | X | X |
| Hot air | X | + | + | ++ | ++ |
| Fats | ++ | ++ | - | + | ++ |
| Oils | ++ | ++ | X | + | ++ |
| Acids | X | * | ++ | X | ++ |
| Bases | - | * | - | X | ++ |

X = None resistance - = Bad resistance + = Good resistance ++ = Excellent resistance * = resistant against specific acids and bases available on demand

FYSICAL PROPERTIES STAINLESS STEEL 20°C

| | | Density | Specific heat capacity | Heat conduction capacity | Electric resistance capacity | Elasticity modulus | Linear expansion coeff. | Magnetic permeability |
|-------|--------|---------|------------------------|--------------------------|------------------------------|--------------------|-------------------------|-----------------------|
| AISI | DIN | kg/dm³ | J / g-K | W / K-m | Ω - mm² / m | 10³ N/mm² | 20° - 100°C / x10⁻⁶/°C | |
| 304 | 1.4301 | 7,90 | 0,50 | 15 | 0,73 | 200 | 17,0 | 1,010 |
| 304L | 1.4306 | 7,90 | 0,50 | 15 | 0,73 | 200 | 17,0 | 1,010 |
| 304L | 1.4307 | 7,90 | 0,50 | 15 | 0,73 | 200 | 17,0 | 1,010 |
| 321 | 1.4541 | 7,90 | 0,50 | 15 | 0,73 | 200 | 17,0 | 1,050 |
| 316 | 1.4401 | 7,95 | 0,50 | 15 | 0,75 | 200 | 16,5 | 1,010 |
| 316L | 1.4404 | 7,95 | 0,50 | 15 | 0,75 | 200 | 16,5 | 1,010 |
| 316TI | 1.4571 | 7,95 | 0,50 | 15 | 0,75 | 200 | 16,5 | 1,050 |
| 316SL | 1.4435 | 7,95 | 0,50 | 15 | 0,75 | 200 | 16,5 | 1,010 |
| 31803 | 1.4462 | 7,70 | 0,50 | 15 | 0,79 | 206 | 13,0 | ferro magnetic |

MECHANIC PROPERTIES STAINLESS STEEL 20°C

| | | Hardness | 0,2- stretch limit | 1% stretch limit | Pull strength | L=5D° Break limit | DVM value | constriction |
|-------|--------|----------|--------------------|------------------|---------------|-------------------|-----------|--------------|
| AISI | DIN | HB max. | min. N/mm² | min. N/mm² | N/mm² min. | min. % | min. J | min. % |
| 304 | 1.4301 | 202 | 205 | 225 | 515 | 40 | 85 | 60 |
| 304L | 1.4306 | 183 | 170 | 215 | 485 | 40 | 85 | 60 |
| 304L | 1.4307 | 183 | 170 | 215 | 485 | 40 | 85 | 60 |
| 321 | 1.4541 | 217 | 205 | 245 | 515 | 40 | 85 | 50 |
| 316 | 1.4401 | 217 | 205 | 235 | 515 | 40 | 85 | 60 |
| 316L | 1.4404 | 217 | 170 | 235 | 485 | 40 | 85 | 60 |
| 316TI | 1.4571 | 217 | 205 | 265 | 515 | 40 | 85 | 50 |
| 316SL | 1.4435 | 217 | 170 | 235 | 485 | 40 | 85 | 60 |
| 31803 | 1.4462 | max. 235 | 450 | 530 | 680 | 30 | 30 | - |

Material certificates

Purpose of the certificates

- Government institutions can require certificates. (TÜV, PED, etc.)
- Warranty for insurance companies regarding objects, which should be covered. (Link between delivered materials and production norm, traceability)
- Logical consequence on a handled norm or specification (warranty according the demanded norm or specification)
- Ease the process of accept or reject materials. (inspection report)
- Source of information in case of failure / claims / O-inspection / etc. (composition, finishing, tolerances etc. according the delivered products)
- Stimulus for the producers to maintain a constant quality level.
- Content / layout according EN 10168
- Confirmation by responsible person(s): Name, function and signature.
- The trader may only deliver certificates or a copy of it, if it is unchanged with a identification between certificate and product. Traceability and identification have to be guaranteed.

The processor of the material is seen as a producer only of he changes the metallurgical state of the product.

There are different levels of certificates. The more the information on a certificate have to be directly derived from the product, the more independent the one has to be who confirms the certificate, the higher the quality level of the certificate.

A certificate, no matter how well it is drawn or who signed it, is worthless if there can not be made an unequivocal connection between the certificate and the delivery. Like for example a heat number. We distinguish 2 kind of certificates which are divided into:

Production declaration

Certificate based on not-specific tests;

A written declaration by the producer, that the delivered product is produced according the order you placed. Any test results don't have to be about the delivered products. Validation of declaration is done by the producer themselves.

2.1 declaration without test results

2.2 declaration inclusive non-specific test results

Test certificate

Certificate based on specific tests;

Published by the producer with the confirmation that the delivered products meet the requirements according in the order.

With list of the test results. The test has to be carried out according the official guidelines. Data of the pre-material may be copied if the traceability and origin of the certificate is guaranteed.

The test result has to be about the delivered products.

3.1 certificate Validation by an official of the producer who is completely independent of the production.

3.2 certificate Validation by an official or a neutral official functionary who is authorised by the producer and the purchasing company.



STAINLESS STEEL SPECIFICATION REGARDING TO CORROSION RESISTANCE

> 11% Chromium
 > 8% Nickel
 Max. 0,02-0,08% Carbon

Protection against moisture and oxidation at a high temperature.

Protection against acid vapour

Limited against the heating of the chromium.
 Carbon influences the hardness of SS

L is for low Carbon (<0,03% carbon).
 Chromium and carbon by the input of heat (welding) create Chromium carbides (weakening) Low C content is against intergranular corrosion

Molybdenum offers more protection against Pit corrosion (affecting of the passivation layer by for example Chlorine- Iodine- or Fluorine ions)

AISI 304 (1.4301)
 17-19,5% Chromium
 8-10,5% Nickel
 0,08% Carbon

AISI 304L (1.4307)
 17-19,5% Chromium
 8-10% Nickel
 0,03% Carbon

AISI 316 (1.4401)
 16,5-18,5% Chromium
 10-13% Nickel
 0,07% Carbon
 2-2,5% Molybdenum

AISI 316L (1.4404)
 16,5-18,5% Chromium
 10-13% Nickel
 0,03% Carbon
 2-2,5% Molybdenum

AISI 316L (1.4435)
 16-18% Chromium
 10-14% Nickel
 0,03% Carbon
 2-3% Molybdenum

Un annealed CC or CD

Bright annealed BC or BD
 (not pickled)

Annealed (pickled) BC or BD

Increasing corrosion resistance

The right annealing process gives protection against stress corrosion
 In combination with tension above 50°C.

Pickle/passivate cleans the surface and accelerates the formation of a new passivation layer (increases the corrosion resistance)

Polishing (CD and BD)
 Damages the passivation layer. This increases the chance of corrosion and removes identification and also the specification.

YOUR STAINLESS STEEL CHOICE

CHEMICAL COMPOSITION ACCORDING EN 10088-2

| AISI | DIN | Steel number acc. EN 10088-2 | Chemical composition | | | Mo % | Mn % | Si % | P % | S % | N % | Ti % |
|-------|--------|---------------------------------|----------------------|---------------|---------------|-------------|------|-----------|---------|---------|---------------|---------------|
| | | | C % | Ni % | Cr % | | | | | | | |
| 304 | 1.4301 | X5 CrNi 18-10 | ≤ 0,07 | 08,00 - 10,50 | 17,00 - 19,50 | - | ≤ 2 | ≤ 1 | ≤ 0,045 | ≤ 0,015 | ≤ 0,11 | - |
| 304L | 1.4306 | X2 CrNi 19-11 | ≤ 0,03 | 10,00 - 12,00 | 18,00 - 20,00 | - | ≤ 2 | ≤ 1 | ≤ 0,045 | ≤ 0,015 | ≤ 0,11 | - |
| 304L | 1.4307 | X2 CrNi 18-9 | ≤ 0,03 | 08,00 - 10,00 | 17,50 - 19,50 | - | ≤ 2 | ≤ 1 | ≤ 0,045 | ≤ 0,015 | ≤ 0,11 | - |
| 321 | 1.4541 | X6 CrNiTi 18-10 | ≤ 0,08 | 09,00 - 12,00 | 17,00 - 19,00 | - | ≤ 2 | ≤ 1 | ≤ 0,045 | ≤ 0,015 | - | 5xCmin - 0,70 |
| 316 | 1.4401 | X5 CrNiMo 17-12-2 | ≤ 0,07 | 10,00 - 13,00 | 16,50 - 18,50 | 2,00 - 2,50 | ≤ 2 | ≤ 1 | ≤ 0,045 | ≤ 0,015 | ≤ 0,11 | - |
| 316L | 1.4404 | X2 CrNiMo 17-12-2 | ≤ 0,03 | 10,00 - 13,00 | 16,50 - 18,50 | 2,00 - 2,50 | ≤ 2 | ≤ 1 | ≤ 0,045 | ≤ 0,015 | ≤ 0,11 | - |
| 316TI | 1.4571 | X6CrNiMoTi 17-12-2 | ≤ 0,08 | 10,50 - 13,50 | 16,50 - 18,50 | 2,00 - 2,50 | ≤ 2 | ≤ 1 | ≤ 0,045 | ≤ 0,015 | - | 5xCmin - 0,70 |
| 316SL | 1.4435 | X2 CrNiMo 18-14-3 | ≤ 0,03 | 12,50 - 15,00 | 17,00 - 19,00 | 2,50 - 3,00 | ≤ 2 | ≤ 1 | ≤ 0,045 | ≤ 0,015 | ≤ 0,11 | - |
| 316L | 1.4432 | X2 CrNiMo 17-12-3 | ≤ 0,03 | 10,50 - 13,00 | 16,50 - 18,50 | 2,50 - 3,00 | ≤ 2 | ≤ 1 | ≤ 0,045 | ≤ 0,015 | ≤ 0,11 | - |
| 310S | 1.4845 | X8 CrNi 25-21 | ≤ 0,10 | 19,00 - 22,00 | 24,00 - 26,00 | - | ≤ 2 | ≤ 1,5 | ≤ 0,045 | ≤ 0,030 | ≤ 0,11 | - |
| 31803 | 1.4462 | X2 CrNiMoN 22-5-3 | ≤ 0,03 | 04,50 - 06,50 | 21,00 - 23,00 | 2,50 - 3,50 | ≤ 2 | ≤ 1 | ≤ 0,035 | ≤ 0,015 | ≥ 0,10 - 0,22 | - |
| 309 | 1.4828 | X15 CrNiSi 20-12 | ≤ 0,20 | 11,00 - 13,00 | 19,00 - 21,00 | - | ≤ 2 | 1,5 - 2,5 | ≤ 0,045 | ≤ 0,030 | ≤ 0,11 | - |

CHEMICAL COMPOSITION ACCORDING A 269 - 07A

| AISI | Steel number acc. ASTM A269 | Chemical composition | | | Mo % | Mn % | Si % | P % | S % | N % | Ti % | |
|------|--------------------------------|----------------------|---------|---------------|---------------|-------------|------|-----|---------|---------|--------|---|
| | | C % | Ni % | Cr % | | | | | | | | |
| 304 | TP | S30400 | ≤ 0,08 | 08,00 - 11,00 | 18,00 - 20,00 | - | ≤ 2 | ≤ 1 | ≤ 0,045 | ≤ 0,030 | ≤ 0,11 | - |
| 304L | TP | S30403 | ≤ 0,035 | 08,00 - 12,00 | 18,00 - 20,00 | - | ≤ 2 | ≤ 1 | ≤ 0,045 | ≤ 0,030 | ≤ 0,11 | - |
| 316 | TP | S31600 | ≤ 0,08 | 10,00 - 14,00 | 16,00 - 18,00 | 2,00 - 3,00 | ≤ 2 | ≤ 1 | ≤ 0,045 | ≤ 0,030 | ≤ 0,11 | - |
| 316L | TP | S31603 | ≤ 0,035 | 10,00 - 15,00 | 16,00 - 18,00 | 2,00 - 3,00 | ≤ 2 | ≤ 1 | ≤ 0,045 | ≤ 0,030 | ≤ 0,11 | - |